

executive suite

boardroom

front office



FEATURES

Available in piece dyed broadloom.

Ultron® nylon 6,6 polymer features a tighter molecular structure with 20% higher resilience and 12% harder surface, resulting in better appearance retention, better resistance to crushing, matting & abrasive wear, and greater design flexibility.

UltraBac® Plus (broadloom)

- Excellent dimensional stability
- High tuft bind
- Resists edge ravel and delamination
- Limited 15-year Wear and Backing Warranty

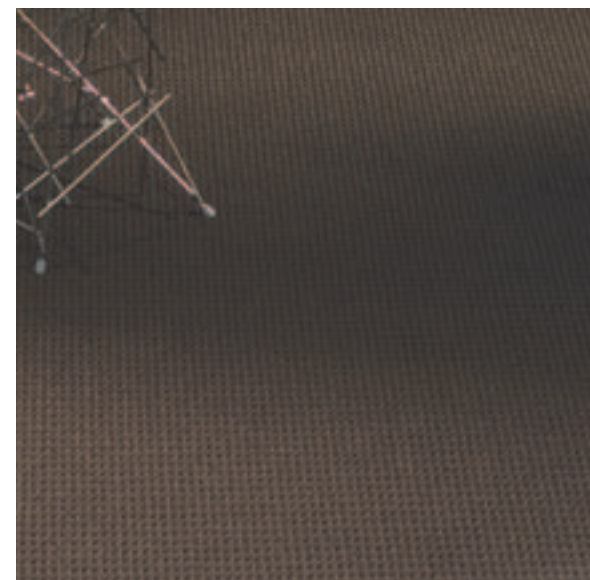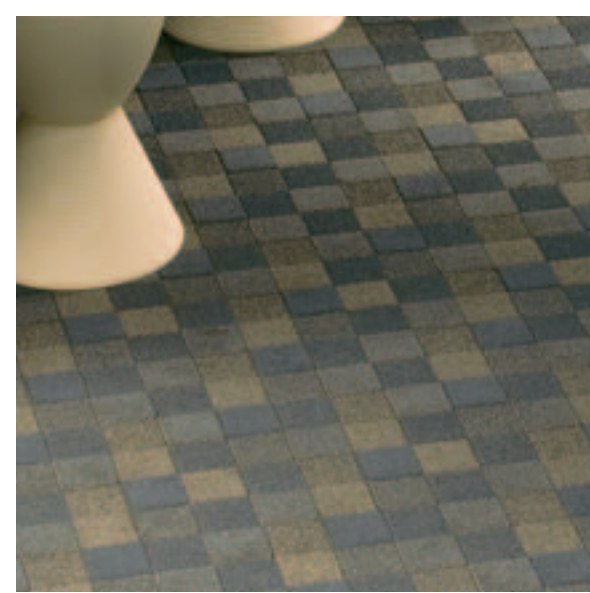

WE THINK BUSINESS

ENVIRONMENTS SHOULD BE

STIMULATING, IMAGINATIVE

AND MOST OF ALL, INVITING.

BECAUSE IT'S WHERE YOU

SPEND MOST OF YOUR TIME.



Exaggerated square styling, reminiscent of the ever-popular checkerboard, gives a modern take to a popular classic for executive suites of all kinds.



This is where it all comes together, inviting color variations with a tight grid like design that conveys versatility by itself or as a team in perfect coordination with virtually anything else you can imagine.



boardroom

Square-like geometrics overlaying a base of multi-dimensional textures creates a refined look with both cosmopolitan flair and color panache that's right for every room.

style	front office	executive suite	boardroom
construction	Textured pattern loop	Textured pattern cut and loop	Textured pattern cut and loop
face fiber	100% Ultron® Nylon 6,6, Premium Branded Fiber	100% Ultron® Nylon 6,6, Premium Branded Fiber	100% Ultron® Nylon 6,6, Premium Branded Fiber
dye method	Piece Dyed	Piece Dyed	Piece Dyed
gauge	1/10	1/10	1/10
stitches per inch	13.8	13.8	14
pile thickness	.144 inches	.180 inches	.200 inches
yarn weight	Tufted – 28 ounces per square yard	Finished – 24 ounces per square yard	Finished – 24 ounces per square yard
pattern repeat	NA	12" x 17 3/4"	4" x 5 3/4"
primary backing	100% Synthetic	100% Synthetic	100% Synthetic
secondary backing	UltraBac® Plus	UltraBac® Plus	UltraBac® Plus
methenamine pill test (ASTM-D-2859)	PASSES	PASSES	PASSES
flooring radiant panel test (ASTM-E-648)	CLASS I (DIRECT GLUE)	CLASS I (DIRECT GLUE)	CLASS I (DIRECT GLUE)
N.B.S smoke chamber test (ASTM-E-662)	<450 (FLAMMING MODE)	<450 (FLAMMING MODE)	<450 (FLAMMING MODE)
electrostatic propensity test (AATCC-134)	< 3.0 KV	< 3.0 KV	< 3.0 KV
average density	7000	4800	4320
standard width	12 FT	12 FT	12 FT
CRI indoor air quality control green label plus ID	GLP0678	GLP0678	GLP0678

CUSTOM COLORS ARE AVAILABLE FOR 133 SQUARE YARD MINIMUM.

Ultron® nylon 6,6 polymer features a tighter molecular structure with 20% higher resilience and 12% harder surface, resulting in better appearance retention, better resistance to crushing, matting & abrasive wear, and greater design flexibility.


Limited 15 Year Wear and Backing Warranty, Ultrabac® Plus.

Specifications are based on averages from normal manufacturing tolerances. Such variations do not affect product performance. Protective chair pads are recommended under office chairs with roller casters to preserve appearance and to avoid premature wear.

As with all quality carpets, slight variation in color may occur from dye lot to dye lot. Maximum dye lot size for piece dyed products is 1300 square yards.

Backings or other materials may be changed without prior notice when shortages occur or when technological advancements provide improved product performance. This product is intended solely for use as an indoor floor covering and is not recommended or sold for any other purpose.

Custom Options, including Borders, Insets, Logos, and Backings are available through our DesignLine department. Carpet designs copyrighted by Mannington Commercial, a business unit of Mannington Mills, Inc ©2006. Ultron® is a trademark of Solutia™ and is used under license to Mannington Mills, Inc.

 Manufactured in Mannington's third party certified facility meeting all ISO 14001 Environmental Standards. Ultron nylon 6,6 is MBDC certified as a Cradle to Cradle Preferred Material



Proud member of the U.S. Green Building Council since 1998.



For samples and information call 800 241 2262 or visit www.mannington.com.