

lifelines II™

folia

inspired

frost

color wash

seurat



PERFORMANCE, VERSATILITY,

SUPERLATIVE DESIGN

AND COLOR. THE IDEAL

COMBINATION OF BEAUTY,

DURABILITY AND CREATIVITY.



In the late 1800s, Seurat, a French artist, developed a technique called pointillism, an innovative method of painting created by the visual mixing of points of color. We've taken this method and used it to create a rich, color-saturated flooring that provides beauty and energy – creating a masterpiece for healthcare spaces.


seurat



LL2402 teaberry
LL2403 saffron
LL2409 riviera

Color wash creates a soothing, softer feel through an inspired combination of translucent and iridescent color chips. The warm and inviting look created by this floor, make it a great choice for women's centers and nursing areas.

color wash

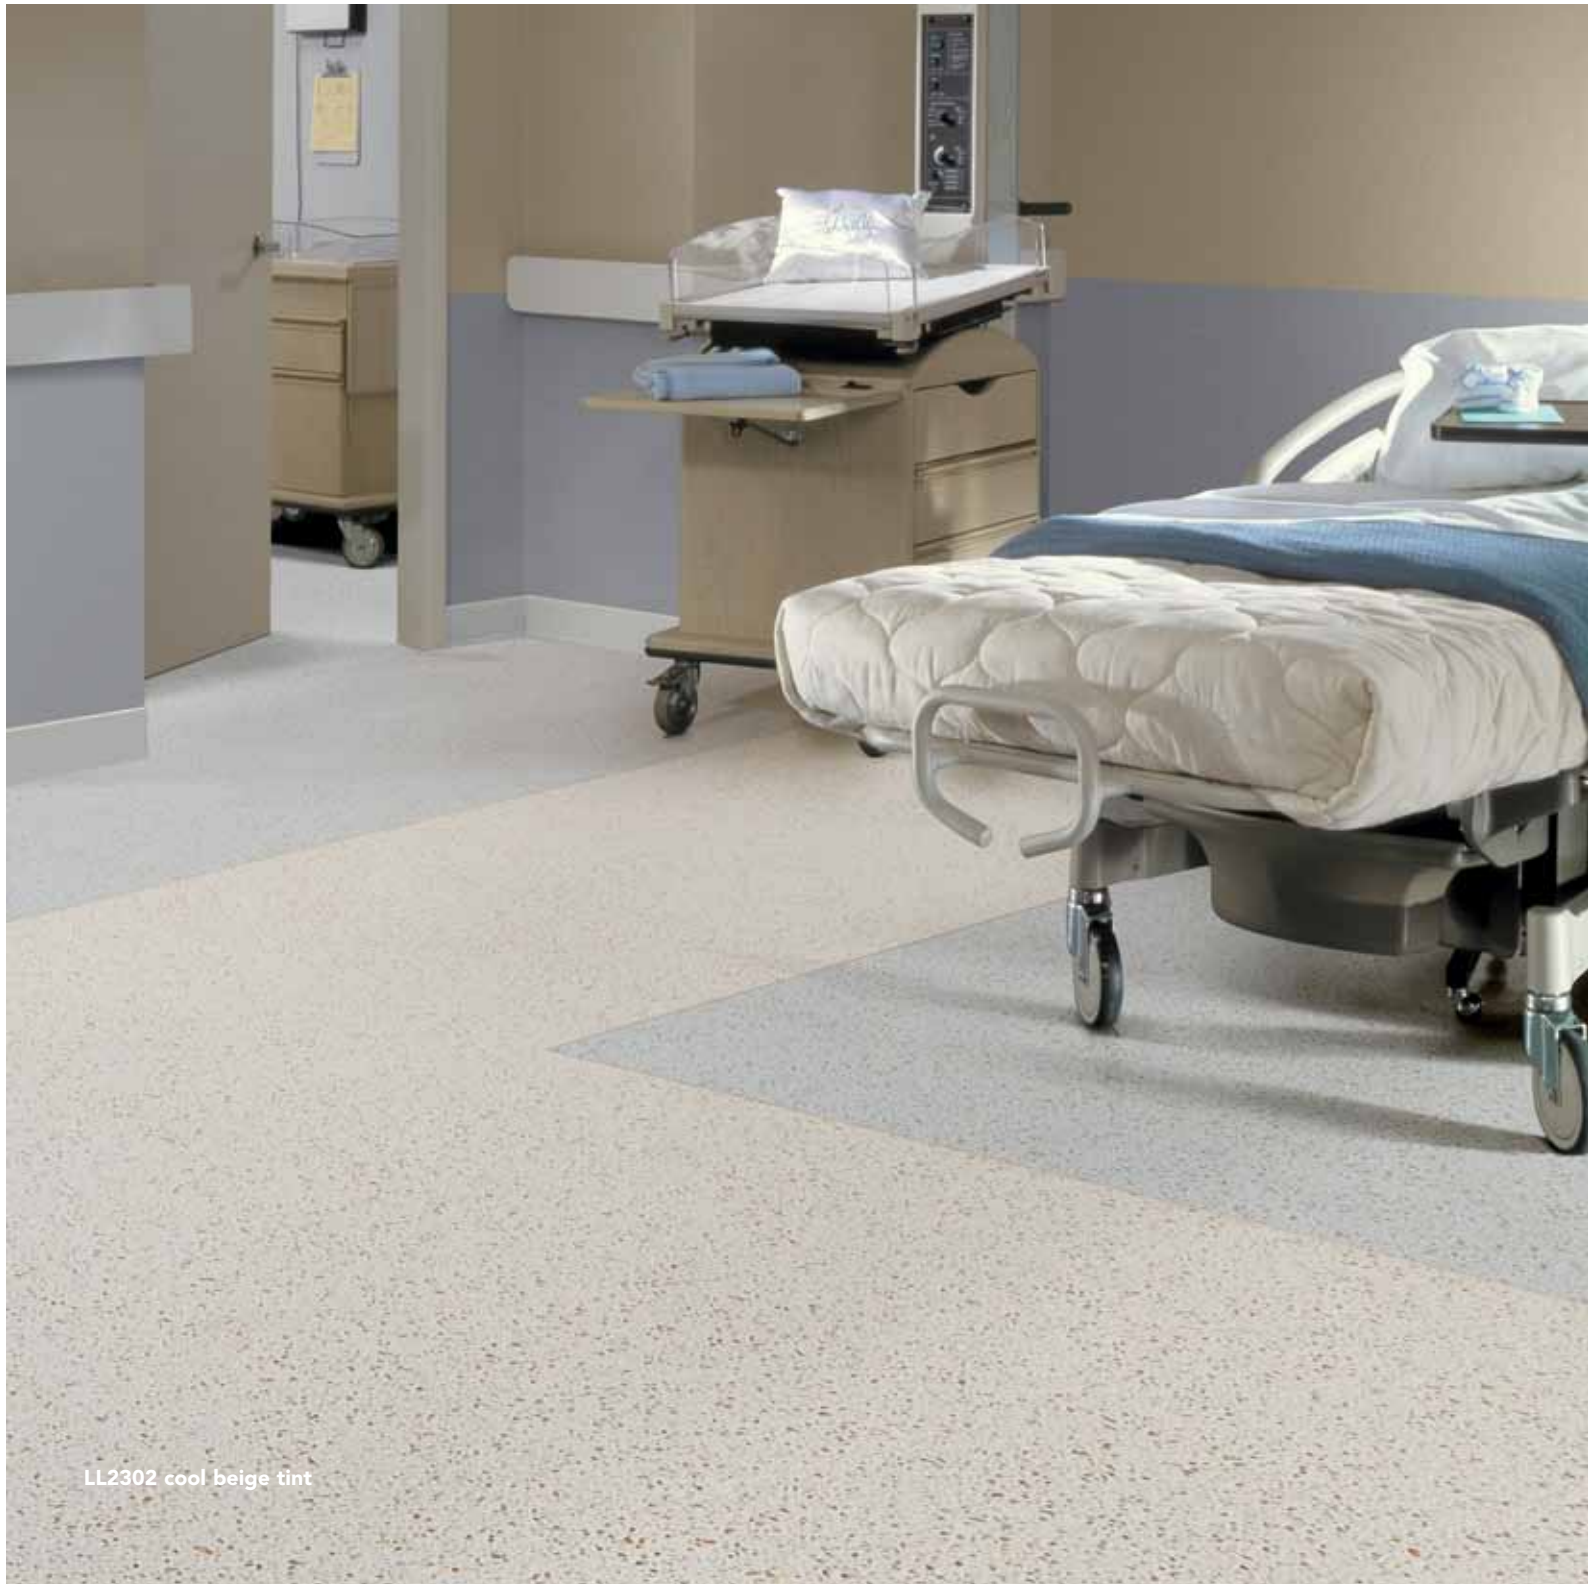

LL2302 cool beige tint

With inspiration drawn from nature, Folia offers layers upon layers of multi-colored leaves that bring the beauty and peace of the outside, inside.

folia



LL2010 spruce

Inspired is a more traditional healthcare design with splashes of accent color that create a soothing and complementary flooring design suitable for any area.

inspired




field: LL2202 cream tones
insets: biospec®

Christus Schumpert NICU
Shreveport, Louisiana

Frost is a delicately marbled design that is perfect alone or mixed with a wide range of colors, giving it unsurpassed versatility for a wide range of healthcare settings.

frost

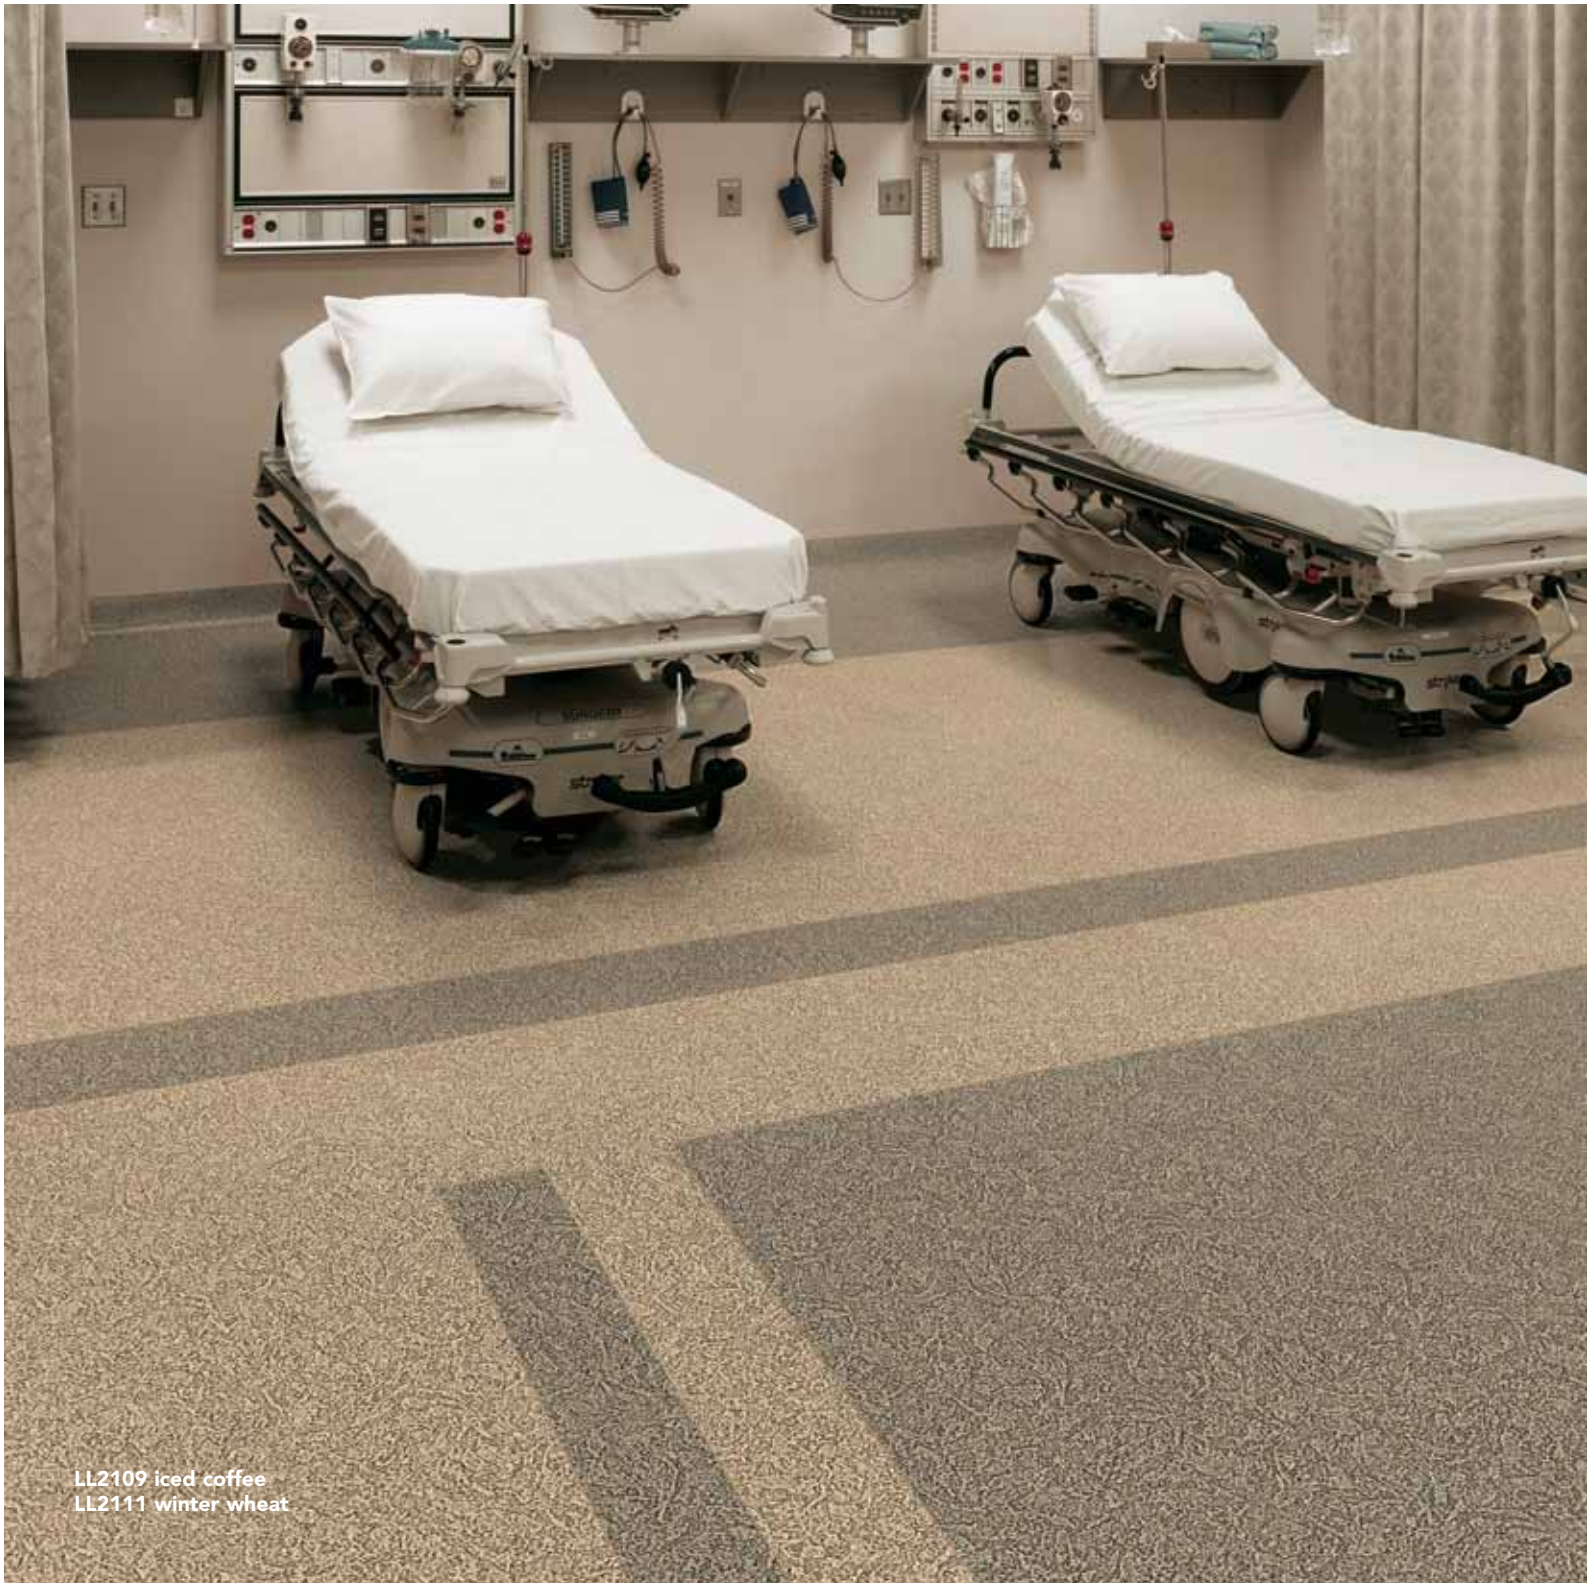

LL2109 iced coffee
LL2111 winter wheat

lifelines II™

weld rod color matching chart		
folia		
LL2010	Spruce	842339
LL2011	Oyster	842322
LL2012	Pearl White	842353
LL2013	Ecru	842364
LL2014	Balsa	842396
LL2015	Fern	842411
LL2017	Flax	842371
LL2016	Cream Beige	842356
frost		
LL2100	Snow Gray	842317
LL2101	Icy Beige	842357
LL2102	Frosted Silk	842356
LL2103	Iced Tea	842335
LL2104	Wintergreen	842362
LL2105	Grape Ice	842374
LL2106	Lime Sherbert	842411
LL2107	Citrus Ice	842393
LL2108	Nordic Blue	842388
LL2109	Iced Coffee	842419
LL2110	Polar Blue	842412
LL2111	Winter Wheat	842399
inspired		
LL2200	Gray Tones	842316
LL2201	Pastel Tones	842310
LL2202	Cream Tones	842322
LL2204	White Multi	842353
LL2205	Beige Multi	842354
LL2206	Blue Tones	842326
LL2208	Willow Tones	842327
LL2209	Woodrose Tones	842349
color wash		
LL2301	Oyster Wash	842322
LL2302	Cool Beige Tint	842367
LL2304	Warm Beige Tint	842309
LL2305	Blue Wash	842326
seurat		
LL2400	Amberjack	842352
LL2401	Heather Beige	842381
LL2402	Teaberry	842423
LL2403	Saffron	842383
LL2404	Emerald Bay	842408
LL2405	French Blue	842332
LL2406	African Night	842368
LL2407	Heather Gray	842317
LL2408	Dover White	842353
LL2409	Riviera	842387
LL2410	Cardigan	842419
LL2411	Brittany Beach	842357

recommended usage				
educational / institutional	classrooms	R	assisted living	
	laboratories	HR	corridors / patient rooms	
	computer labs	NR4	residence kitchens (d)	
	multipurpose rooms	HR	game/tv rooms	
	cafeterias, dining areas (d)	R	lavatories	
	food service areas (d)	Rf	retail	
	dormitory rooms	R		sales floors
	locker rooms (no spikes)	NR3		checkout / cash wrap
	lavatories	HR		food service (d)
	corridors	HR		specialty shops/areas
	ramps	NR		produce areas
	utility / storage areas	R		entryways
	dance studios	NR		frozen foods
	light industrial (e)	research laboratories		HR
production laboratories		HR		offices/conference rooms
clean rooms		HR	computer rooms	
small parts assembly		HR	corridors	
sterile packaging		HR	lobbies	
photo processing		HR	elevators	
computer repair labs		NR4	vestibules/entryways	
electronic testing labs		NR4	lunchrooms (d)	
electronics manufacturing		NR4	utility/storage rooms	
hospital / healthcare (a)		patient rooms	HR*	hospitality
	patient corridors	HR	vestibules/entryways	
	operating rooms (b)	HRh	lobbies	
	scrub rooms	HRh	elevators	
	emergency rooms/areas	HR**	dining rooms (d)	
	procedure rooms	HR	corridors	
	laboratories	HR	hospitality rooms	
	physical therapy (f)	HR	lavatories	
	dialysis (f)	HR	lounges	
	hyperbaric rooms	NR4	indoor pool/spa decks	
	critical / intensive care	HR	*apoxy installation required under beds **polish may be required	
	ramped corridors	NR		
	utility / storage areas	R		

Each of the following classifications –HR (Highly Recommended), R (Recommended), and NR (Not Recommended) are based on performance, cost, and the design criteria of the space – not solely on performance.

HR: Highly Recommended-An excellent floor for the space.
R: Recommended-Other floors may be better suited.
NR: Not Recommended-Should not be used in this space.

The following code explains why a floor receives an NR recommendation.

- 1 Aseptic Area-Hygienic conditions are extremely important.
- 2 Water Resistance-Wet area installation is necessitated (flash covering, sealed seams).
- 3 Slip Retardance-A more secure surface is dictated.
- 4 Static control flooring normally called for in this area.
- 5 Required maintenance not practiced in this area.
- 6 Low Contrast (LC) colors available.

NOTES:

- a In most cases, veterinary applications are similar.
- b Only use in operating rooms not requiring conductive flooring.
- c Prices are estimates. Actual prices vary. Such elements as competitive bids, labor costs, and job conditions will affect final price.

d Mannington Resilient Floors are not recommended for commercial kitchens.

e Mannington Resilient Floors are not recommended for heavy industrial areas.

f No standing water; non-staining walk-off mats required.
g Heat weld only.

h Not recommended in laboratories that require special decontamination procedures on surfaces, including floors.

i For areas where there can be significant exposure to trafficked dirt and debris, it is recommended that 1-2 coats of a high quality finish be utilized to minimize the risk of ground in trafficked grime.

j Higher level of maintenance may be required versus smooth surface floors.

k Hospital beds must use flat, minimum 1" wide casters.

l V-85 Adhesive required under hospital beds and heavy rolling loads.

m Polish may be required.

NOTE: Mannington Resilient Floors are not recommended for exterior use or where golf or track shoes are present.

NOTE: Mannington Resilient Floors are not suitable as wall covering or wall surfacing. All Mannington Commercial sheet floors can be flash covered (integral cove). Most building codes consider flash covering in the same category as baseboard trim when applied to fire coding. Consult fire codes in your area to determine allowable height for flash cove.

lifelines II™

folia

inspired

frost

color wash

seurat

FEATURES

LifeLines II features 5 collections offering performance, versatility, superlative design and color.

Quantum Guard™ HP is Mannington's patented high performance wearlayer with urethane aluminum oxide topcoat cured by a UV process. A low maintenance floor providing superior appearance retention, cleanability, durability and slip retardance. Quantum Guard™ HP can eliminate the need for polish over an extended period of time depending upon the amount of commercial traffic. While not rated for ramps, the Quantum Guard™ HP finish provides an enhanced level of traction and protection against slip compared to standard resilient floors.

With our homogenous through-chip construction, the color will not wear out and stains, cuts and gouges will be drastically minimized. LifeLines II will hold up to heavy rolling loads or high traffic areas.

Mannington's solid color weld rods are color-integrated with the LifeLines II collection to blend or create a monolithic appearance. They are also used to accent seams, enhance a boarder, outline a custom inset, or used for wayfinding design.

Heat-welded seams provide an aseptic and integral surface that blocks the penetration of dirt and moisture. For optimal stain resistance performance, heat-welded seams should be sealed with a polish or sealer. Mannington's heat-welding rods are required in hospitals and high traffic environments.

Limited 5 Year Quantum Guard™ HP Finish Warranty.
Limited 5 Year Commercial Warranty.



- NSF-332 Gold Certified
- Certified under FloorScore - an independent 3rd party IAQ verification system for low emitting flooring. Approved as CHPS 01350 compliant and recognized in LEED EQ Credit 4.3
- Adhesive meets VOC content limit of SCAQMD Rule#1168
- ISO 9001 and 14001 registered manufacturing facility
- Made in the USA