

nature's paths® select



DESIGNS THAT GO BEYOND

THE NATURAL BEAUTY OF

WOOD TO CREATE TRULY

UNFORGETTABLE INTERIORS



This narrow plank styling pays homage to the classic beauty of traditional oak flooring.

oakford strip



12166 chestnut brown



12151 spicy cider

The elegant and always stylish tones of cherry are subtly accented in this traditional favorite.

century cherry

Rich, dark wood tones create an exotic and rare flooring adventure.

wenge



12163 almost black



12140 sable

Distinctive wood grain is complemented by a lightly distressed finish for unparalleled beauty and drama.

heritage hickory

Multi-tonal shades of naturally aged wood forge a rustic look with modern flair.

mountain pine



12159 weathered gray

Distinctive lines and vivid graining creates a new tradition in classic style.

chatham oak





12168 colonial

This time-honored flooring evokes the distressed beauty and essence of varying grains and rich colorations.

princeton cherry



12161 latte

The crisp, clean colors of wild beech are enhanced by subtle grain variations that brighten any setting.

wild beech

The character of rough-hewn wood comes alive with this distinctive American classic.

barn wood plank



Mannington Commercial Luxury Tile (LVT) with Quantum Guard™ HP

Quantum Guard HP is a patented urethane wearlayer with aluminum oxide cured by ultra-violet (UV) process. It is the highest performance urethane finish in the industry which provides exceptional wear resistance, stain resistance, and lowers maintenance cost.

aluminum oxide

Aluminum oxide is a hard, tough natural-occurring mineral aggregate. On the MOH (measure of hardness) scale, diamond is a ten, aluminum oxide is a nine.

low maintenance: no polish

- No polish, no buffing maintenance option
- Superior appearance retention
- Exceptional wear and stain resistance
- Unsurpassed cleanability and durability
- Provides enhanced slip retardance compared to standard resilient floors
- Limited 10 Year Wear Warranty

environmental benefits

Quantum Guard HP's proven performance keeps product on the floor longer— one of the most significant ways to lessen the environmental impact. Quantum Guard HP can eliminate the need for harsh cleaning agents, strippers and polishes. Products are 3rd party certified under FloorScore as low VOC emitting and meets CHPS 01350 IAQ requirements.



stain & wear performance

Developed to visually demonstrate stain performance and wear simulation.


Stain Performance – Applied Kiwi brown shoe polish and asphalt driveway sealer to samples.

Samples were exposed to the stainants for two (2) hours. At the end of the two (2) hour test period, the stainants were cleaned with a paper towel dampened with isopropyl alcohol.

Wear Simulation – Mini-Martindale Abrasion and Pilling Tester Model 401 with 100 grit sandpaper.

“Light Wear” samples were exposed to elliptical cycles of 100 grit sandpaper with 125 gram weights.

“Heavy Wear” samples were exposed to elliptical cycles of 100 grit sandpaper with 260 gram weights.

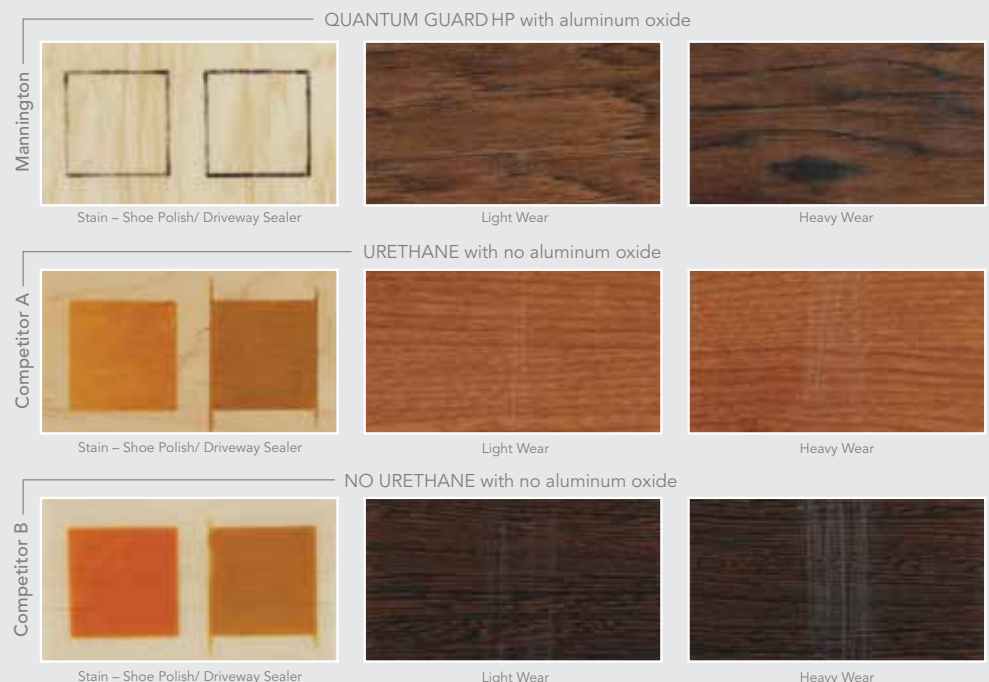

FEATURES

Nature's Paths Select planks use the dramatic textures, tones and colors of natural wood that are warm and inviting.

Nature's Paths Select achieves remarkable realism, which combines the latest advances in imaging, texturing and finishing creating the most authentic products.

Quantum Guard™ HP a patented urethane wearlayer with aluminum oxide cured by ultraviolet UV process. It is the highest performance urethane finish in the industry which provides exceptional wear resistance, stain resistance and lowers maintenance cost. No polish, no buffing maintenance option.

Nature's Paths Select is highly resistant to scratching, cracking and tearing. Allows for heavy rolling loads and foot traffic.

Edges and corners are carefully milled and the flexible construction makes for an easy installation.

Limited 10 Year Commercial Warranty. Limited 10 Year Quantum Guard™ HP Wear Warranty.



- Certified under FloorScore - an independent 3rd Party IAQ verification system for low emitting flooring. Approved as CHPS 01350 compliant and recognized in LEED IEQ Credit 4.3
- ISO 9001 and 14001 registered manufacturing facility
- Adhesives meet VOC Content limit of SCAQMD Rule #1168 and can contribute to LEED IEQ Credit 4.1